

A Perfect 10

1 MORE HEIGHT HERE

Platform elevates workers and cargo a full 3.05 m (10 ft.), providing 4.88 m (16 ft.) of reach for restocking and an endless number of tasks.

2 MORE ROOM HERE

Extra large material tray is mounted on a steel frame for durability and provides 28% more cargo space than others.

3 MORE CAPACITY HERE

Transports up to 272 kg – 160 kg (600 lbs. – 350 lbs.) in the operator compartment and 115 kg (250 lbs.) on the material tray.

4 MORE CONTROL HERE

Advanced Point & Go® drive and steer joystick control leaves one hand free.

6 MORE STANDARD FEATURES HERE

Meets requirements of international standards including platform rail configuration, alarms and operations of controls.

5 MORE UPTIME HERE

Maintenance-free components minimise service needs and maximise uptime.

8 MORE RUNTIME HERE

Standard maintenance-free battery provides 25% more duty cycles than others.

7 MORE MOBILITY HERE

Zero turning radius for excellent manoeuvrability in confined spaces.

10 MORE DURABILITY EVERYWHERE

Built tough and backed by our 1 & 5 warranty for worry-free performance.

9 LESS CHARGE TIME HERE

High-efficiency charging system with 50% faster charge time than others in its class.

Find out how you can achieve higher profits, faster payback and improved worker safety with the JLG SSV10.

Visit www.JLG.com or

call +44 (0) 1698 811005.

www.jlg.com

JLG

The Power To Do More




SSV10

STORE SUPPORT VEHICLE

TYPICAL APPLICATIONS

From the back warehouse to the front of the store, the JLG SSV10 offers a higher, stronger and smarter productivity choice for hundreds of daily employee tasks.

- Stock Picking and Restocking Shelves
- Transporting Supplies
- Inventory Management
- Display Set-Up
- Hanging Decorations
- General Maintenance and Repair

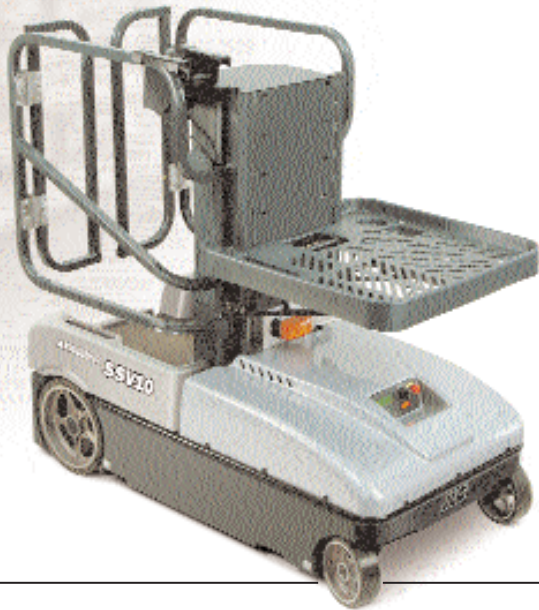

STANDARD FEATURES

- Point & Go® Drive and Steer System
- One Hand Joystick Control
- Proportional Drive and Elevate Controls
- Sealed Maintenance-Free Batteries
- Automatic 5 Hour, 20 Amp Charger
- Battery Discharge Status Indicators at Platform and Base Controls
- Heavy-Duty Aluminum Mast Sections
- Maintenance-Free Mast Guide System
- Strobe Lights Front & Rear
- Programmable Alarm
- Descent Alarm and Amber Warning
- Slope Cut-Out Control Interlock
- Mast Storage Pocket
- Stand-On Foot Switch Operation Enable Control
- Platform Gate Operation Interlock
- Separate Drive and Elevation Controls
- Extra Large Material Tray 0.66 m x 0.66m (26 in. x 26 in.)
- Adjustable Tray Height
- Built-In Fork Truck Pockets
- Non-Marking Tyres
- Hourmeter
- Horn
- CE, ANSI, OSHA, & CSA Compliant
- JLG "1 & 5" Warranty

OPTIONS

- Charger Cord Retractor
- Programmable 4-Digit Security Lock
- Bike Carrier Accessory
- Rug Carrier Accessory
- Fluorescent Light Tube Caddy
- Guide Roller System
- Side and Front Bumpers

SPECIFICATIONS

Working Height	4.88 m (16 ft.)	Maximum Tray Stowed Height	1.32 m (52 in.)
Platform Height	3.05 m (10 ft.)	Maximum Tray Elevated Height	4.04 m (159 in.)
Overall Width	75 cm (29.5 in.)	Maximum Drive Speed	
Overall Length	1.52 m (60 in.)	-Platform Lowered.....	6.4 km/h (4 mph)
Overall Stowed Height	1.42 m (56 in.)	-Platform Elevated.....	0.96 km/h (0.6 mph)
Gross Vehicle Weight	454 kg (1,000 lbs.)	Turning Radius	Zero
Operator Compartment Capacity	159 kg (350 lbs.)	Gradeability	15%
Material Tray Capacity	113 kg (250 lbs.)	Wheel Diameter & Width	
Combined Capacity	272 kg (600 lbs.)	-Drive Wheel	32 x 10 cm (12 5/8 x 4 in.)
Platform Size (L x W)	51 x 69 cm (20 x 27 in.)	-Front Caster	20 x 6 cm (8 x 2.5 in.)
Platform Entry Height	33 cm (13 in.)	Wheel Material	Non-Marking Poly
Platform Entry	Rear – Saloon Door Gates	Battery	Maintenance-Free AGM (2)
Material Tray Dimensions (L x W)	67 x 68 cm (26.5 x 26.8 in.)	Battery Charger	20 Amp Automatic
Material Tray Area	0.46 sq m (4.9 sq ft.)	Charge Time	5 Hours Maximum
Minimum Tray Stowed Height	86 cm (34 in.)	Drive System	Direct Electric



The JLG "1 & 5" Warranty

JLG Industries, Inc. backs our products with our exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification.

This machine meets or exceeds applicable ANSI A92.6-1999, CAN3-B354.2-M82 and OSHA regulations in 29 CFR 1910.67 and 29 CFR 1926.453 as originally manufactured for intended applications.



JLG Industries, Inc.
Kilmartin Place, Tannochside Park,
Uddingston, G71 5PH, Scotland,
United Kingdom
Tel: +44 (0) 1698 811005
Fax: +44 (0) 1698 811055
e-mail address: europe@jlg.com

